

INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter EPI 8287 features the extremely robust and stable thin-film-on-steel sensor element from its well-proven predecessor EPI 8297. In combination with the new inhouse developed ASIC TX it offers a wide temperature range up to 125°C and triple overpressure safety which makes it the perfect solution for a wide range of demanding applications.



Applications

- Machine tools
- Hydraulics
- Industrial applications

Features

- Excellent long-term stability
- Completely welded steel sensor system without additional seals
- Accuracy classes 0.3%, 0.5%
- Optional: 5-fold overpressure resistance
- Optionally with housing material AISI316L

Technical Data			
Measuring principle	Thin-film-on-steel	Accuracy @ 25°C typ.	± 0.5 % FS typ. ± 0.3 % FS typ.
Measuring range	0 ... 0.2 to 0 ... 600 bar 0 ... 3 to 0 ... 7500 psi	Media temperature	-40°C ... +125°C
Output signal	4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC, 0.5 ... 4.5 VDC ratiometric	Ambient temperature	-40°C ... +125°C Cable PVC: -5°C ... +60°C Cable PUR: -20°C ... +70°C Cable Raychem: -20°C ... +100°C
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.		

10/2019

Data sheet H723171

Subject to change

Electrical connection	Male electrical connector EN 175301-803-A (DIN43650-A), Mat. PA				05
	Male electrical connector M12x1, 5-pole, Mat. PBT				35
	Male electrical connector Packard Metri Pack, Mat. PBT				51
	Male electrical connector, industrial standard (contact distance 9.4 mm), Mat. PBT				01
	Male electrical connector MIL-C 26482, 6-pole, metal ¹²⁾				02
	Male electrical connector: DIN72585 Code 1, Mat.: PBT (Contacts Mat.: Sn) ¹³⁾				25
	Cable PUR (Screwed cable gland PA 6-3), -20°C ... +70°C ^{8) 9)}				24
	Cable PVC (Screwed cable gland PA 6-3), -5°C ... +60°C ^{8) 9) 10)}				22
	Cable Raychem (Screwed cable gland PA 6-3), -20°C ... +100°C ^{8) 9) 10)}				08
Output signal	Signal output	Load resistance	I (supply)	U (supply)	
	4 ... 20 mA	(U _{supply} -9 V) / 20 mA		9 ... 32 VDC	19
	0 ... 5 VDC	> 2.5 kΩ	< 10 mA	9 ... 32 VDC	14
	1 ... 6 VDC	> 5.0 kΩ	< 10 mA	9 ... 32 VDC	16
	0 ... 10 VDC	> 5.0 kΩ	< 10 mA	15 ... 32 VDC	17
	0.5 ... 4.5 VDC ratiometric	> 5.0 kΩ	< 10 mA	5 (4.75 ... 5.25) VDC	23
Accessories	Seal FPM, -18°C ... +125°C ³⁾				61
	Seal EPDM, -40°C ... +125°C ³⁾				63
	Seal NBR, -25°C ... +100°C ³⁾				83
	Pressure peak damping element ø 1.0 mm, material 1.4305 ⁴⁾				40
	Pressure peak damping element ø 0.4 mm, material 1.4305 (sensors 23, 25) resp. 1.4404 (sensors 33, 35) ⁴⁾				44
	Female electrical plug EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C, for cable diameter 4 ... 9 mm, flammability standard UL94-V0				46
	Female electrical plug EN 175301-803-A (DIN43650-A)/Silicone, -40°C ... +125°C, for cable diameter 4 ... 9 mm, flammability standard UL94-V0				56
	Female electrical plug EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C, for cable diameter 4 ... 9.5 mm, flammability standard UL94-V2				58
	Female electrical plug M12x1, 5-pole				33
	Female electrical plug industrial standard				34
	Special electrical connection: Pin 1 +, Pin 2 - (only for output signal 4 ... 20 mA and male electrical connector EN175301-803-A / DIN43650-A)				92
	Special electrical connection: Pin 1 Out, Pin 2 -, Pin 3 + (only for output 14, 16, 17 and male electrical connector EN175301-803-A / DIN43650-A)				98
	Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 Out (only for output 14, 16, 17 and male electrical connector EN175301-803-A / DIN43650-A)				97
	Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 GR (only for output 4...20mA and male electrical connector M12x1, 5-pol.)				94
	Special electrical connection: Pin 1 +, Pin 3 - (only for output 4 ... 20 mA and male electrical connector Packard Metri Pack 3-poles)				E4
	Special electrical connection: Pin 1 +, Pin 2 out Pin 3 - (only for output signals 14, 16, 17 and male electrical connector Packard Metri Pack 3-poles)				99
	Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)				L9
	Cable length 1.5 m				1M
	Cable length 3.0 m				3M
	Cable length 5.0 m				5M
	Multiple packaging ¹¹⁾				VM

¹⁾ Customized pressure ranges upon request

²⁾ Upon request

³⁾ Only with pressure connection 17 (G1/4")

⁴⁾ Not for pressure connections 10, 11, 13, 18, 24

⁵⁾ Only for pressure ranges ≥ 10 bar

⁶⁾ Max. allowable pressure range 60 bar at 180 bar overpressure

⁷⁾ Only for pressure connections 17, 31 (upon request: 30, 42, 61)

⁸⁾ Cable length see accessories (max. length 50 m, in 5-meter sections)

⁹⁾ IP68, max. 3 m, Media +10°C ... +35°C

¹⁰⁾ Cable length max. 3 m, for pressure ranges ≤ 16 bar

¹¹⁾ The order quantity must be a multiple of 50, only for electrical connections 05 and 35

¹²⁾ Only for sensors 23 and 25, only for pressure connections 13, 17, 19, 53, only for output signal 4 ... 20 mA (code 19)

¹³⁾ Only for sensors 23 and 25, only for pressure connections 13, 17, 19, 53

Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Signal output	Supply [VDC]
EPI2.5A	8287 75 2517 05 0000 0000 19 44 58 61	0 ... 2.5	7.5	4 ... 20 mA	9 ... 32
EPI4.0A	8287 76 2517 05 0000 0000 19 44 58 61	0 ... 4	12	4 ... 20 mA	9 ... 32
EPI6.0A	8287 77 2517 05 0000 0000 19 44 58 61	0 ... 6	18	4 ... 20 mA	9 ... 32
EPI10.0A	8287 78 2517 05 0000 0000 19 44 58 61	0 ... 10	30	4 ... 20 mA	9 ... 32
EPI16.0A	8287 79 2517 05 0000 0000 19 44 58 61	0 ... 16	48	4 ... 20 mA	9 ... 32
EPI25.0A	8287 80 2517 05 0000 0000 19 44 58 61	0 ... 25	75	4 ... 20 mA	9 ... 32
EPI40.0A	8287 81 2517 05 0000 0000 19 44 58 61	0 ... 40	120	4 ... 20 mA	9 ... 32
EPI60.0A	8287 82 2517 05 0000 0000 19 44 58 61	0 ... 60	180	4 ... 20 mA	9 ... 32
EPI100.0A	8287 83 2517 05 0000 0000 19 44 58 61	0 ... 100	300	4 ... 20 mA	9 ... 32
EPI160.0A	8287 85 2517 05 0000 0000 19 44 58 61	0 ... 160	480	4 ... 20 mA	9 ... 32
EPI250.0A	8287 74 2517 05 0000 0000 19 44 58 61	0 ... 250	750	4 ... 20 mA	9 ... 32
EPI400.0A	8287 84 2517 05 0000 0000 19 44 58 61	0 ... 400	1000	4 ... 20 mA	9 ... 32
EPI600.0A	8287 86 2517 05 0000 0000 19 44 58 61	0 ... 600	1500	4 ... 20 mA	9 ... 32
EPI2.5V	8287 75 2517 05 0000 0000 17 44 58 61	0 ... 2.5	7.5	0 ... 10 VDC	15 ... 32
EPI4.0V	8287 76 2517 05 0000 0000 17 44 58 61	0 ... 4	12	0 ... 10 VDC	15 ... 32
EPI6.0V	8287 77 2517 05 0000 0000 17 44 58 61	0 ... 6	18	0 ... 10 VDC	15 ... 32
EPI10.0V	8287 78 2517 05 0000 0000 17 44 58 61	0 ... 10	30	0 ... 10 VDC	15 ... 32
EPI16.0V	8287 79 2517 05 0000 0000 17 44 58 61	0 ... 16	48	0 ... 10 VDC	15 ... 32
EPI25.0V	8287 80 2517 05 0000 0000 17 44 58 61	0 ... 25	75	0 ... 10 VDC	15 ... 32
EPI40.0V	8287 81 2517 05 0000 0000 17 44 58 61	0 ... 40	120	0 ... 10 VDC	15 ... 32
EPI60.0V	8287 82 2517 05 0000 0000 17 44 58 61	0 ... 60	180	0 ... 10 VDC	15 ... 32
EPI100.0V	8287 83 2517 05 0000 0000 17 44 58 61	0 ... 100	300	0 ... 10 VDC	15 ... 32
EPI160.0V	8287 85 2517 05 0000 0000 17 44 58 61	0 ... 160	480	0 ... 10 VDC	15 ... 32
EPI250.0V	8287 74 2517 05 0000 0000 17 44 58 61	0 ... 250	750	0 ... 10 VDC	15 ... 32
EPI400.0V	8287 84 2517 05 0000 0000 17 44 58 61	0 ... 400	1000	0 ... 10 VDC	15 ... 32
EPI600.0V	8287 86 2517 05 0000 0000 17 44 58 61	0 ... 600	1500	0 ... 10 VDC	15 ... 32

Specifications		
Electrical Data	Output / supply voltage	4 ... 20 mA: 24 (9...32) VDC 0 ... 5 VDC: 24 (9...32) VDC 1 ... 6 VDC: 24 (9...32) VDC 0 ... 10 VDC: 24 (15...32) VDC 0.5 ... 4.5 VDC ratiometric 10 ... 90 % U_{supply} : 5 ± 0.25 VDC
	Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure
	Switch-on-delay	100 ms
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	4 ... 20 mA: to $U_s = 32$ VDC 0 ... 10 VDC, 0 ... 5 VDC, 1 ... 6 VDC: to $U_s = 28$ VDC 0.5 ... 4.5 VDC ratiometric: to $U_s = 14$ VDC
	Environmental conditions	
	Media temperature	-40°C ... +125°C
	Ambient temperature	-40°C ... +125°C Cable PVC: -5°C ... +60°C Cable PUR: -20°C ... +70°C Cable Raychem: -20°C ... +100°C
	Protection ¹⁾	IP65, IP67, IP68
	Humidity	Max. 95 % relative
	Vibration	15 g RMS (20...2000 Hz) acc.to EN 60068-2-64 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) acc.to EN 60068-2-6
	Shock	500 g / 1 ms acc.to EN 60068-2-27
EMC Protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical Data	Sensor (wetted parts)	1.4542 (AISI630)
	Pressure connection (wetted parts)	1.4542 (AISI630) or 1.4404 (AISI316L)
	Housing	1.4542 (AISI630) or 1.4404 (AISI316L)
	Sealing	FPM/EPDM/NBR
	Male electrical plug	See ordering information
	Weight	appr. 80 ... 110 g
	Mounting torque	25 Nm


¹⁾ See electrical connection

Accuracy


		$\geq 0.2 \text{ bar}$ $\leq 0.6 \text{ bar}$	$> 0.6 \text{ bar}$ $< 2.0 \text{ bar}$	$\geq 2.0 \text{ bar}$
TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.5	± 1.0
Accuracy @ +25°C	[% FS typ.]	± 0.8	± 0.6	± 0.3
NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2	± 0.2
TC zero point and span	[% FS/K typ.]	± 0.02	± 0.02	± 0.01
Long term stability 1 year	[% FS typ.]	± 0.3	± 0.2	± 0.1
Mounting dependency with 180° rotation (vibration and shock)	[% FS max.]	0.5 mbar	0.5 mbar	0.5 mbar

Rise time: typ. 1 ms / 10 ... 90 % nominal pressure

Measuring accuracy 0.5 %

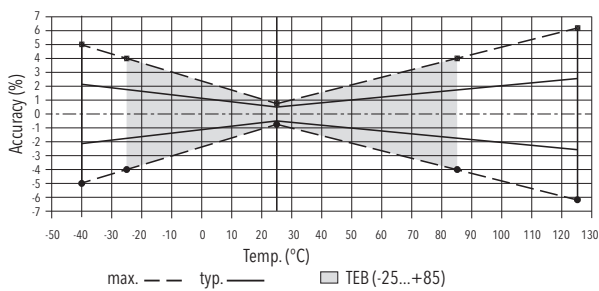

Measuring accuracy 0.3 %

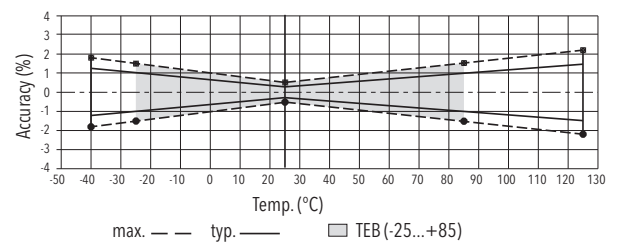


Additional information


Documents

Data sheet	www.trafag.com/H72317
Instructions	www.trafag.com/H73317
Flyer	www.trafag.com/H70692


Dimensions

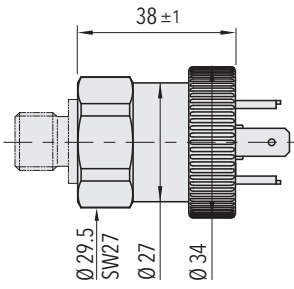


8287.XX.XXXX.05.XX.XX

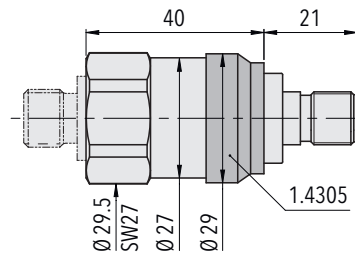


8287.XX.XXXX.35.XX.XX

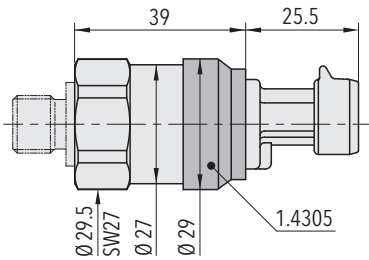


8287.XX.XXXX.51.XX.XX

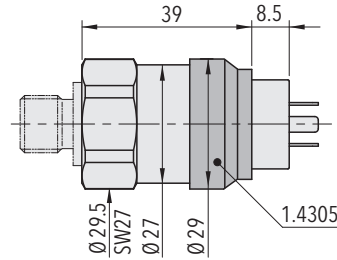


8287.XX.XXXX.01.XX.XX

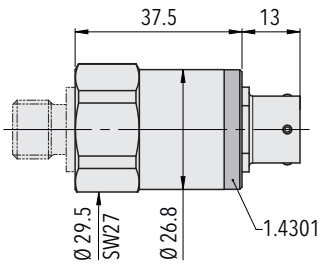

8287.XX.XXXX.02.XX.XX

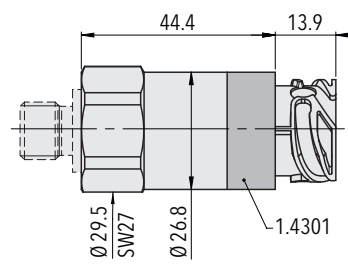


8287.XX.XXXX.25.XX.XX

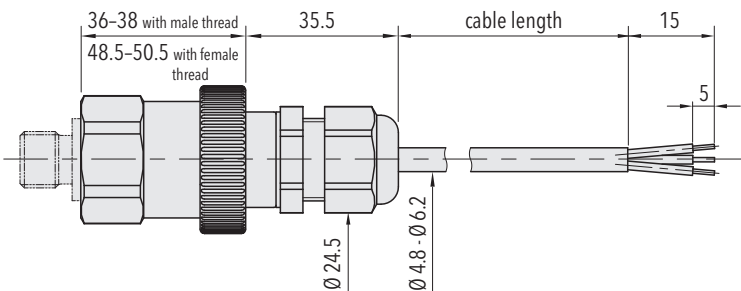


8287.XX.XXXX.24/22/08.XX.XX


Dimensions




8287.XX.XX10.XX.XX.XX




8287.XX.XX17.XX.XX.XX




8287.XX.XX53.XX.XX.XX




8287.XX.XX11.XX.XX.XX




8287.XX.XX30.XX.XX.XX




8287.XX.XX13.XX.XX.XX




8287.XX.XX51.XX.XX.XX




8287.XX.XX19.XX.XX.XX




8287.XX.XX31.XX.XX.XX




8287.XX.XX18.XX.XX.XX




8287.XX.XX42.XX.XX.XX



8287.XX.XX24.XX.XX.XX




8287.XX.XX61.XX.XX.XX




1) Tightening torque 50...60 Ncm

8287.XX.XXXX.XX.XX.46/56




1) Tightening torque 50...60 Ncm

8287.XX.XXXX.XX.XX.58



8287.XX.XXXX.XX.XX.33



8287.XX.XXXX.XX.XX.34

Electrical connection

		Protection / electrical connection						
		IP65*) **)	IP67*) **)	IP67*) **)	IP65**)	IP67*) **)	IP69K*)	
		Industrial standard EN175301-803A	M12x1 5-pole	Packard Metri Pack 3-pole	Industrial standard Contact distance 9.4 mm	MIL-C 26482	DIN 72585**) Code 1	
		05	35	51	01	02	25 ¹⁾	
Output signal	<p>Standard 92</p> <p>2 1 4 1 1 1 2</p> <p>1 2 1 3 2 3 1</p> <p>⊕ ⊕ ⊕ ⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p> <p>8287.XX.XXXX.XX.19</p>	<p>Standard 94</p> <p>1 1 1 1</p> <p>3 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard E4</p> <p>2 1 1 1</p> <p>1 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 98</p> <p>3 1 2 1</p> <p>1 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 97</p> <p>1 3 4 1</p> <p>3 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>
	<p>for DC</p> <p>Supply ⊕</p> <p>Output ⊕</p> <p>Common ⊖</p> <p>Earth (housing) ⊕</p> <p>Shield***)</p> <p>8287.XX.XXXX.XX.14/16/17/23</p>	<p>Standard 98</p> <p>3 1 2 1</p> <p>1 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 97</p> <p>1 3 4 1</p> <p>3 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 98</p> <p>3 1 2 1</p> <p>1 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 97</p> <p>1 3 4 1</p> <p>3 3 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>	<p>Standard 99</p> <p>1 1 1 1</p> <p>2 2 3 3</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>⊕ ⊕ ⊕ ⊕</p> <p>⊖ ⊖ ⊖ ⊖</p> <p>Shield***)</p>

¹⁾ Only for output signal 23

*1) Provided female electrical plug is mounted according to instructions

**1) Ventilation via male electric plug/cable end

***1) Only cable versions or female electrical plug with shield connection

		Protection / electrical connection	
		IP68 max. 3 m	IP68 max. 3 m
		Cable**1)	Cable**1)
		24/22	08
Output signal	<p>Standard 92</p> <p>white</p> <p>brown</p> <p>yellow</p> <p>red</p> <p>black</p> <p>green</p> <p>Shield***)</p> <p>8287.XX.XXXX.XX.19</p>	<p>white</p> <p>brown</p> <p>yellow</p>	<p>red</p> <p>black</p> <p>green</p>
	<p>for DC</p> <p>Supply ⊕</p> <p>Output ⊕</p> <p>Common ⊖</p> <p>Earth (housing) ⊕</p> <p>Shield***)</p> <p>8287.XX.XXXX.XX.14/16/17/23</p>	<p>white</p> <p>green</p> <p>brown</p> <p>yellow</p>	<p>red</p> <p>white</p> <p>black</p> <p>green</p>